

LINEA

Lustrini

Rosone multiplo circolare

Round multiple canopy

Grappolo di sospensioni, con cavo lungo 3 mt, regolabili in altezza al momento dell'installazione. Il rosone circolare (bianco o nero matt) permette di realizzare un insieme fino a 6 sospensioni. Per eventuale decentralizzazione è disponibile l'appendimento in ottone anticato. Rosone ed appendimento sono da ordinare a parte.

Cluster of pendants, with a 3-meter-long cable, adjustable in height at the time of installation. The round multiple canopy (white or black matt) allows to realize set up to 6 pendants. For eventual decentralization it's available the support in aged brass. Canopy and decentralization support are to be ordered separately.



Insieme composto da:
Set made of:

- 1) Art. R.L8/BM
- 6) Art. L2MINI/MIX/BM
- 6) Art. MAN


Insieme composto da:
Set made of:

- 1) Art. R.L8/BM
- 1) Art. L1MINI/MIX/BM
- 1) Art. L2MINI/MIX/BM
- 1) Art. L3MINI/MIX/BM
- 1) Art. L4MINI/MIX/BM
- 1) Art. L5MINI/MIX/BM
- 1) Art. L6MINI/MIX/BM



LINEA
Lustrini

Esempio di installazione
Example of installation

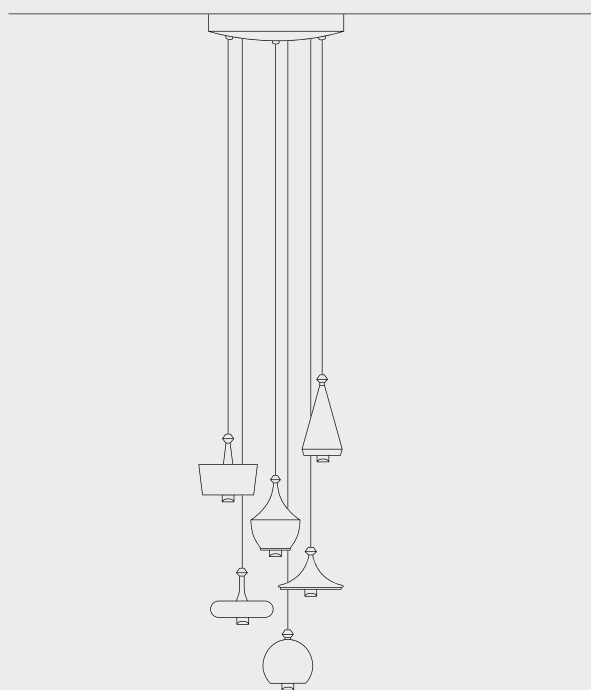

1) Art. R.L8/...



1) Art. L1MINI/MIX/...



1) Art. L2MINI/MIX/...



1) Art. L3MINI/MIX/...



1) Art. L4MINI/MIX/...



1) Art. L5MINI/MIX/...



1) Art. L6MINI/MIX/...




ARTICOLO ITEM	DESCRIZIONE DESCRIPTION	DIMMERAZIONE DIMMING	ALIMENTAZIONE E MODULO LED POWER AND LED MODULE	COLORE LED LED COLOUR	POTENZA POWER	PESO GR. WEIGHT GR.	VOL. IN M ³ VOL. IN M ³	FINITURA FINISHING	FASCIA PREZZO PRICE RANGE
L1MINI/MIX/...	Sospensione per rosone multiplo comprensiva di cavo nero 3 mt. Pendant for round multiple canopy with a 3-meter-long black cable	NO	lumen: 475 350mA CRI: > 90 durata: 40.000H	3000°K Bianco caldo Warm white	5W *	1600	0,02	BL, BM, NL, NM, MR	B49
								CU, PT	B64
								AU	B74
L2MINI/MIX/...	Sospensione per rosone multiplo comprensiva di cavo nero 3 mt. Pendant for round multiple canopy with a 3-meter-long cable	NO	lumen: 475 350mA CRI: > 90 durata: 40.000H	3000°K Bianco caldo Warm white	5W *	1600	0,02	BL, BM, NL, NM, MR	B49
								CU, PT	B64
								AU	B74
L3MINI/MIX/...	Sospensione per rosone multiplo comprensiva di cavo nero 3 mt. Pendant for round multiple canopy with a 3-meter-long black cable	NO	lumen: 475 350mA CRI: > 90 durata: 40.000H	3000°K Bianco caldo Warm white	5W *	1600	0,02	BL, BM, NL, NM, MR	B49
								CU, PT	B64
								AU	B74
L4MINI/MIX/...	Sospensione per rosone multiplo comprensiva di cavo nero 3 mt. Pendant for round multiple canopy with a 3-meter-long black cable	NO	lumen: 475 350mA CRI: > 90 durata: 40.000H	3000°K Bianco caldo Warm white	5W *	1600	0,02	BL, BM, NL, NM, MR	B49
								CU, PT	B64
								AU	B74
L5MINI/MIX/...	Sospensione per rosone multiplo comprensiva di cavo nero 3 mt. Pendant for round multiple canopy with a 3-meter-long black cable	NO	lumen: 475 350mA CRI: > 90 durata: 40.000H	3000°K Bianco caldo Warm white	5W *	1600	0,02	BL, BM, NL, NM, MR	B49
								CU, PT	B64
								AU	B74
L6MINI/MIX/...	Sospensione per rosone multiplo comprensiva di cavo nero 3 mt. Pendant for round multiple canopy with a 3-meter-long black cable	NO	lumen: 475 350mA CRI: > 90 durata: 40.000H	3000°K Bianco caldo Warm white	5W *	1600	0,02	BL, BM, NL, NM, MR	B49
								CU, PT	B64
								AU	B74
R.L8/...	Rosone multiplo per insieme di 6 lampade Multiple canopy for 6 suspension lamps					1000	0,02	BM, NM	B36
MAN	Supporto in ottone anticato per fissaggio cavo Decentralization support in aged brass								B13

CE IP20  * Driver incluso / Driver included


BL = Finitura bianco lucido / Glossy white
BM = Finitura bianco matt / Matte white
NL = Finitura nero lucido / Glossy black
NM = Finitura nero matt / Matte black
MR = Finitura metal rame / Copper metal

AU = Finitura oro / Gold
CU = Finitura rame / Copper
PT = Finitura platino / Platinum


Art. L1MINI/MIX/...

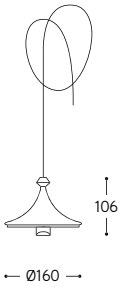


Art. L2MINI/MIX/...




Art. L3MINI/MIX/...

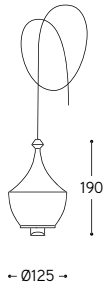


Art. L4MINI/MIX/...

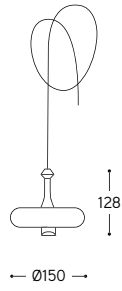


Art. L5MINI/MIX/...

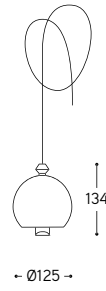

Art. L6MINI/MIX/...

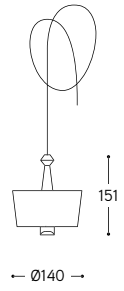

Art. R.L8/...



Art. MAN

